



THE **ALLIANCE** ADVANTAGE

2021



POLYMERIC SAND



SLATE GREY

BEIGE

Gator Supersand

For concrete paver joints up to 1" in traditional applications

Ideal for

- Residential use
- Traditional applications
- Concrete pavers, wet cast products
- Sloped areas, pool areas, patios, walkways, driveways and more

Features

- Traditional applications, **Rain safe 1 hour** after water activation
- Works above 32°F (0°C)
- Waterproof bag
- 15 Year Limited Warranty
- Advanced Haze Free Technology



ASTM C-144



SLATE GREY

BEIGE

Gator Maxx Sand

For concrete paver joints up to 2" in traditional and overlay applications

- Available in USA only

Ideal for

- Residential and Commercial use
- Traditional and overlay applications
- Concrete pavers, natural stones and wet cast products
- Streetscapes, commercial work, steep slopes, pool areas, patios, walkways, driveways, parking areas and more

Features

- Traditional applications, **Rain safe 1 hour** after water activation
- Overlay applications, **Rain safe 24 hours** after water activation
- Works above 32°F (0°C)
- Waterproof bag
- 15 Year Limited Warranty
- Advanced Haze Free Technology





ASTM C-144





**NO DUST • HAZE FREE
NO BLOWER • ONE WATERING
RAIN SAFE AFTER 15 MINUTES**



Gator Supersand **G2**

For joints up to 2" in traditional applications

Ideal for

- Residential use
- Traditional applications
- Concrete pavers, natural stones, wet cast products and clay pavers
- Sloped areas, pool areas, patios, walkways, driveways and much more

Features

- Traditional applications, **Rain safe 15 minutes** after water activation
- Works above 32°F (0°C)
- Waterproof bag
- 15 Year Limited Warranty
- Faster installation time



ASTM C-144

Gator Maxx **G2**

For joints up to 4" in traditional applications and 2" in overlay applications

Ideal for

- Residential and Commercial use
- Traditional and overlay applications
- Concrete pavers, natural stones, wet cast products and clay pavers
- Streetscapes, commercial work, steep slopes, pool areas, patios, walkways, driveways and parking areas

Features

- Traditional applications, **Rain safe 15 minutes** after water activation
- Overlay applications, **Rain safe 24 hours** after water activation
- Works above 32°F (0°C)
- Waterproof bag
- 15 Year Limited Warranty
- Faster installation time



ASTM C-144



SCAN TO WATCH
PRODUCT VIDEO

For more product details consult TDS on AllianceGator.com

POLYMERIC SAND



Gator Tile Sand

For outdoor porcelain tile joints

Ideal for

- Residential use
- Pedestrian use
- Outdoor porcelain tile joints

Features

- Traditional applications, **Rain safe 1 hour** after water activation
- Works above 32°F (0°C)
- Waterproof bag
- For use with the Gator Tile System only

SLATE GREY

BEIGE

IVORY

BLACK DIAMOND

GATOR TILE SAND CAN ONLY BE USED WITH THE GATOR TILE 7 COMPONENT SYSTEM



Gator Fabric GF4.4



Gator Base



Gator Block Bond XP




Gator Tile Edge



Gator Spacer



Gator Tile Sand



Gator Base Screws

Visit AllianceGator.com for more details about the Gator Tile System

POLYMERIC SAND



Eurostone Bond

For natural stone paver joints

Ideal for

- Residential and Commercial use
- Stone joints up to a maximum of 1.5" (3.8 cm)
- Stone roads, piazzas, driveways, pathways & stone apron driveways

Features

- Traditional applications, **Rain safe 1 hour** after water activation
- Overlay applications, **Rain safe 24 hours** after water activation
- Works above 32°F (0°C)
- Does not haze natural stone pavers
- Will resist mechanical brooming
- Waterproof bag
- 15 Year Limited Warranty

SLATE GREY

BEIGE

IVORY

BLACK DIAMOND

PERMEABLE STONE



Gator Aqua Rock

Graded ASTM No.9 granite stone

Ideal for

- Residential and Commercial use
- Permeable paver joints and bedding material
- Driveways, parking lots, patios and more

Features

- Graded to meet ASTM No. 9
- High-strength granite stone for long-term use
- Reduction of storm water run off
- Calibrated for the majority of permeable pavers
- 2,200 lb Supersack available for large applications

GRANITE GREY

POLYMERIC STONE DUST

GATOR DUST BOND : ASK FOR IT BY NAME! DON'T COMPROMISE!

Gator Dust Bond

Easy to install • Sweep it • Tamp it • Water it. And you're done!

Ideal for

- Residential use
- Pedestrian use
- Patios, walkways, pool areas and more
- Joints 1/2" to 6" wide

Features

- Traditional applications, **Rain safe**
24 hours after water activation
- Works above 59°F (15°C)
- Waterproof bag
- 15 Year Limited Warranty

Coverage

Quantity required depends on the shape and size of the stones as well as the width of the joints.

| Coverage per 50 lb (22.7 kg) bag Wet cast or natural stones 2" to 2-1/2" in height | Joints (1" to 2") |
|---|---|
| Stone Grey & Sahara Beige | 20 to 30 sq. ft. (1.86 to 2.79 sq. m.) |

Packaging

- Retail Size: 50 lb (22.7 kg)
- Waterproof bags

Helps Prevent

- Weed sprouting
- Damages caused by insects
- Erosion due to climatic conditions

STONE GREY

SAHARA BEIGE



SCAN TO WATCH
PRODUCT VIDEO

For more product details consult TDS on AllianceGator.com

NEW



**HIGH-PERFORMANCE
POLYMERS FOR
ADDED STRENGTH**

**FORMULATED
FOR BETTER
WORKABILITY**

**CONTINUOUS
LATERAL SUPPORT
MATRIX**

XTreme Edge

The Ultimate reinforced 3D Micro-Fiber mesh Structural Edge.

Ideal for

- Traditional, open graded and permeable applications
- Overlay and Gator Base applications
- Pedestrian and vehicular use
- Concrete pavers, slabs, natural and wet cast stone applications


Features

- High-performance polymers for added strength
- Reinforced with 3D micro-fiber mesh
- Continuous lateral support matrix
- Freeze and thaw resistant


XTREME EDGE vs CONCRETE MIX

- **2X** Stronger
- **2X** Faster setting time
- Easier and faster to install


Applications




Traditional



**Permeable or
Open Graded**



Gator Base



Overlay

NEW



SCAN TO WATCH
PRODUCT VIDEO



5 YEAR
LIMITED WARRANTY

**APPLY RAIN
OR SHINE**

*** STRENGTH FROM
TOP TO BOTTOM**

**** PERMEABLE**

Gator Nitro Joint Sand

Gator Nitro Joint Sand is a ready-to-use mixture of calibrated sand and resins which cure when exposed to air, hardening from top to bottom of the joint. The product can be installed in wet or dry weather, in joints ranging from a minimum 3/16" to a maximum 2" joint width. The minimum joint depth is 1".

Ideal for

- Natural and wet cast stones
- Concrete pavers and slabs
- Traditional base
- Permeable or open graded installations
- Gator Base installations
- Pedestrian use
- Patios, pool areas, walkways

* Gator Nitro Joint Sand will harden from top to bottom up to 2 3/8".

** Permeable when installed. If not maintained, permeability will be obstructed over time.



Features

- Proprietary formula with stronger resins and quick-activating catalysts deliver:
- **25%** More strength
- **25%** Faster setting time

Available in 3 beautiful colors

GREY

BEIGE

BLACK

For more product details consult TDS on AllianceGator.com

FOLLOW THE TREND!

USE **GATOR BASE** TO BUILD YOUR SEAT WALL

THE GATOR BASE ADVANTAGES FOR SEAT WALLS

- Gator Base is made of durable engineered material and will last forever
- Jobs are completed 20% faster than the old way
- Reduces needless excavation
- Reduces the effects of freeze and thaw cycles
- Less destruction on property during installation phase

IDEAL FOR:

- Patios
- Pool decks
- Pathways
- Around a fire pit
- In gardens

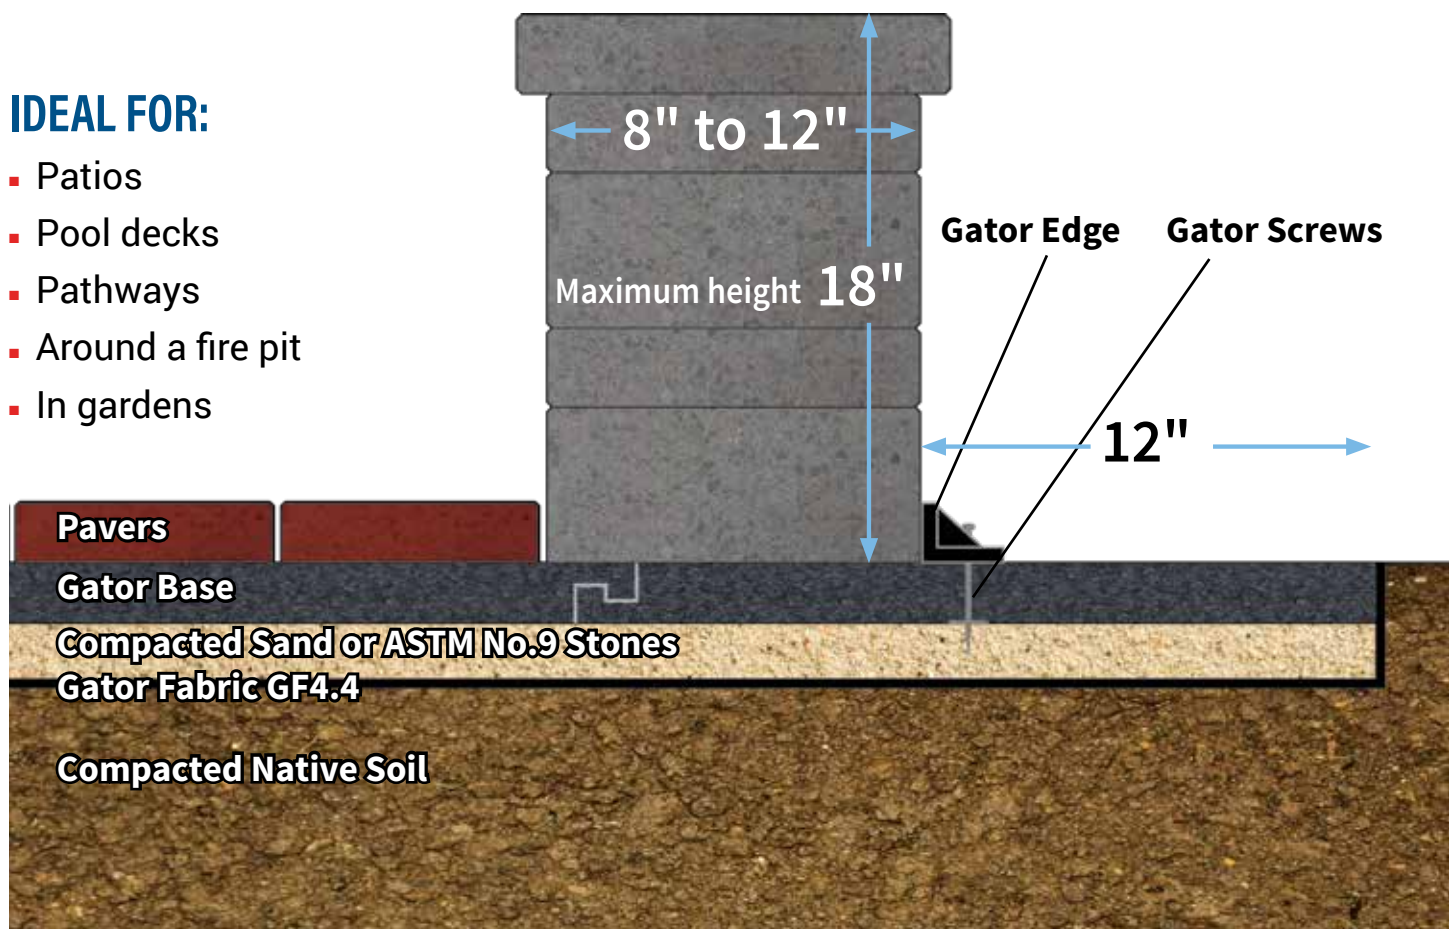


Diagram not drawn to scale.



A GAME CHANGER... WE WILL PROVE IT TO YOU!

4 days of the Gator Base way
equals
5 days of the old way



WATCH OUR
MUST-SEE VIDEOS AT


4 *equals* **5**.com



What is Gator Base?

- Manufactured using lightweight high-density polypropylene
- Has an R-Value of 3.6 which acts as a thermal blanket
- Is extremely durable and will not degrade in the ground
- Equivalent to 288 lb (130 kg) of crushed stone
- Designed with a tongue and groove system LOCK-N-GO
- Replaces 6" (15 cm) of compacted crushed stone
- Evacuates water through the channel and holes
- **Designed for pedestrian applications only**

Water evacuates
through sloped
channels and holes




Dimensions: 24" x 36" (60 cm x 90 cm)

Under License from Brock International
Patented and Patents Pending: www.brockpaverbase.com

How does Gator Base work?


GATOR BASE WAY vs. THE OLD WAY

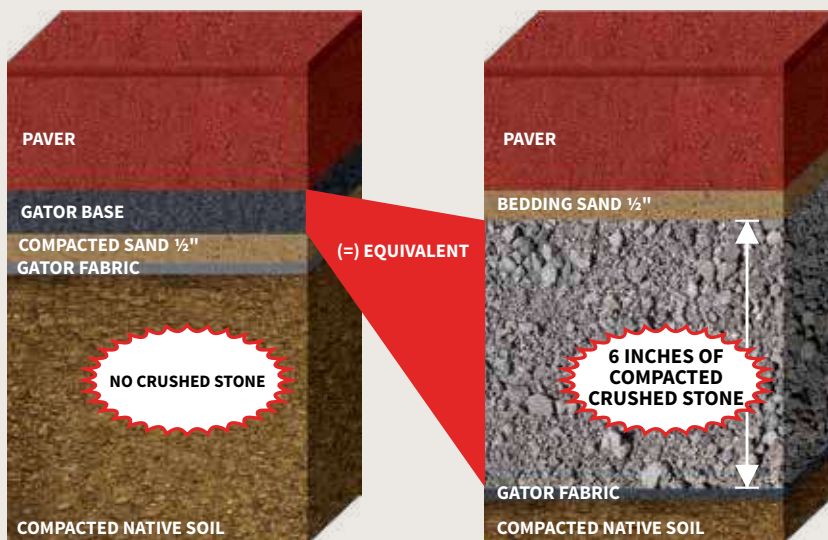

**Gator Base replaces
6" of crushed stone!**

Sand or ASTM No. 9 Stone can be used under Gator Base panels

Gator Base saves hours of work!

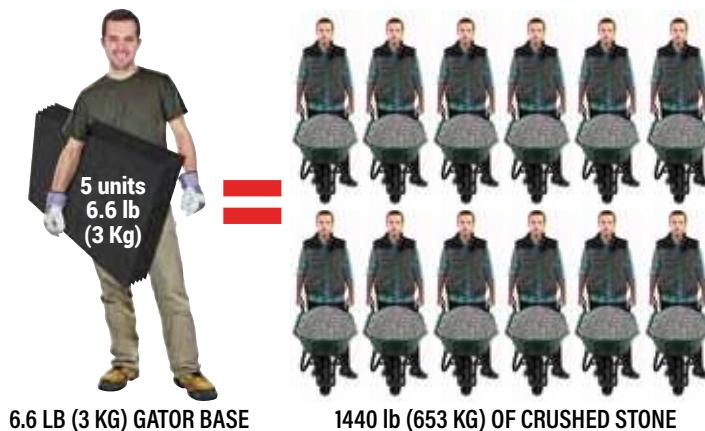

6.6 LB (3 KG) GATOR BASE

1440 lb (653 KG) OF CRUSHED STONE

- 5 units of Gator Base covers 29.4 sq.ft. (2.7 sq.m.) and weighs 6.6 lb (3 kg)
= Installed within minutes!
- 29.4 sq.ft. (2.7 sq.m.) filled with 6" (15 cm) of crushed stone weighs 1440 lb (653 kg)
= Hours of work!



Why use Gator Base?

- Save 6" (15 cm) of extra excavation
- Save on cost of truck and driver on the road
- Save on wear and tear on machinery
- Save on costly dumping fees
- Save on overall installation time
- Save minimum 20% on labor costs

When and Where to use Gator Base?

- Installing large format pavers and slabs
- Staging pavers throughout the Gator Base
- Avoid stepping on setting bed
- Causing less disturbance and destruction to the property
- Replaces a traditional granular base
- Completing job minimum 20% faster
- Tolerant against rain showers
- Material storage is prohibited in streets



Pathway



Narrow Areas



Patios

WATCH OUR
MUST-SEE VIDEOS AT **4equals5.com**



SCAN TO WATCH
PRODUCT VIDEO

IT'S A BETTER INSTALLATION



FASTEST SETTING HARDSCAPE ADHESIVE

Gator Block Bond XP

Xtra Performance Polyurethane Adhesive

Formulated for

- Overlays and pool copings
- Steps and wall caps
- Fire pits up to 204°C (400°F)
- Retaining walls
- Masonry units
- Wet cast and natural stones
- Concrete pavers and bricks
- Dry and damp surfaces

Xtra fast cure time
Xtra bond strength
Xtra durability





Gator Edge Rigid and Flex

Features

- Easy to use and quick to install
- Great lateral support
- Makes defining alleys, driveways or sidewalks easier
- Made with 100% polypropylene or polyethylene for strength and flexibility
- Gator Edge Rigid and Flex can be interconnected with the "Twist & Lock" system
- For thin pavers and slab applications, use Gator Edge Mini
- For tile applications, use Gator Tile Edge
- Gator Screws are used to fasten Gator Tile, Mini, Flex or Rigid edge to the Gator Base
- Edge can be fastened with nails
- All Gator Edge products are 8 linear feet



Gator 10", 12" Common and Spiral nails

Gator Edge Rigid

Gator Edge Flex

Gator Edge Rigid and Flex can be connected with the "Twist & Lock" system




Gator Mini Edge
1"(25 mm) height



Gator Tile Edge
5/8"(15 mm) height

BEFORE

AFTER

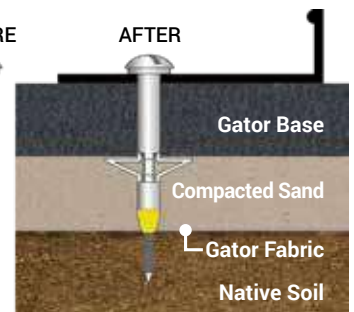

Gator Base Screws

50 screws per pack
20 packs per box





SELECT THE RIGHT GATOR GRID FOR YOUR HARDSCAPE PROJECT

NO MEMORY - STAYS FLAT LIKE NO OTHER!



GG 20-20 BIAXIAL

STAIRCASES AND
LOW RETAINING WALLS



1,368
lbf/ft



GG 30-30 BIAXIAL

STAIRCASES AND
HIGH RETAINING WALLS



2,052
lbf/ft



GG 50-50 BIAXIAL

MULTI-LEVEL
STRUCTURAL
ENGINEERED WALLS




3,420
lbf/ft

Features


- Biaxial: can be installed in both directions
- Pliable, stays 100% flat during installation, will not curl up on itself
- Ageing-resistant
- High tensile strength
- Adds strength, stability and longevity
- Helps reduce stress and structural load transfer
- Soil separation for added stability

Applications

- Staircase internal structures
- Low retaining wall
- Erosion control
- General landscape



BIAXIAL AND PLIABLE




GATOR GRIDS STAYS FLAT WHEN UNROLLED

Features

- Biaxial: can be installed in both directions
- Pliable, stays 100% flat during installation, will not curl up on itself
- Ageing-resistant
- High tensile strength
- Adds strength, stability and longevity
- Helps reduce stress and structural load transfer
- Soil separation for added stability

Applications

- Staircase internal structures
- Raised patio internal structures
- Retaining wall structures
- Soil stability
- Erosion control
- General landscape

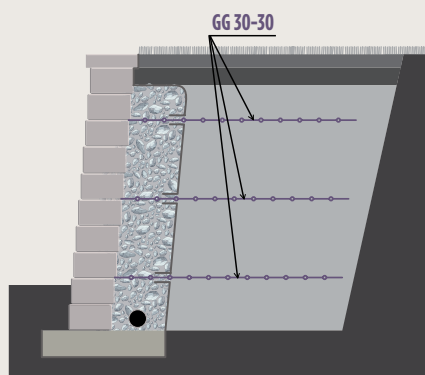


Features

- Biaxial: can be installed in both directions
- Pliable, stays 100% flat during installation, will not curl up on itself
- Ageing-resistant
- High tensile strength
- Adds strength, stability and longevity
- Easily combined with gravel and soil
- Helps reduce stress and structural load transfer
- Soil separation for added stability

Applications

- Raised patio internal structures
- Retaining wall structures
- Multi-level wall structures
- Roadway structure
- Parking space structure
- General landscape
- Soil stability
- Erosion control

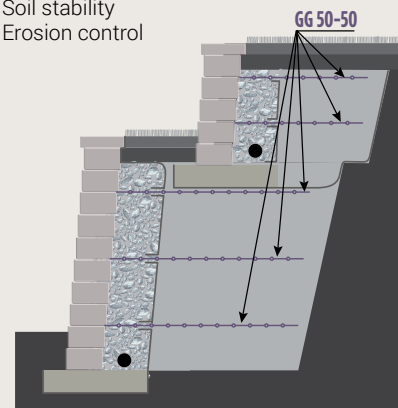

Gator Grid Placement Disclaimer

The soil composition may vary from location to location. Global stability of the soil has not been considered. It is the owner's responsibility to take into consideration the soil parameters indicated on the label and to ensure that the soil's properties meet construction standards. A soil analysis must be done before starting any wall project. Before the construction of your segmental wall and before using any type of Gator Grid and establishing the placement, consult a qualified local engineer and obtain a stamped plan. To ensure the structural integrity of your segmental retaining wall, follow manufacturer instructions and installation steps for the construction of your wall. These placement tables are not to be used on multi-tiered walls or in areas with excess water runoff, seepage or springs, unless first otherwise confirmed by a qualified local engineer. Additional Gator Grid than what appears on the label may be required in your application. This document should not be construed as engineering advice. We assume no liability of any kind if the instructions in the present disclaimer are not followed or if the owner's use of the product is different than the one for which it is intended.



SELECT THE RIGHT

GATOR FABRIC

FOR YOUR HARDSCAPE PROJECT



GF3.5 NON-WOVEN

PATIOS
AND WALKWAYS




80
lbf



GF4.4 NON-WOVEN

PATIOS, WALKWAYS
AND DRIVEWAYS



100
lbf



GF5 WOVEN FABRIC

DRIVEWAYS




200
lbf

Features

- Hydrophilic, allows high-water flow (165 gallons per minute per foot)
- Drainage and filtration
- Soil separation
- Erosion control

Applications

- Staircases
- Patios and walkways
- Low retaining wall
- Garden and hardscape covering

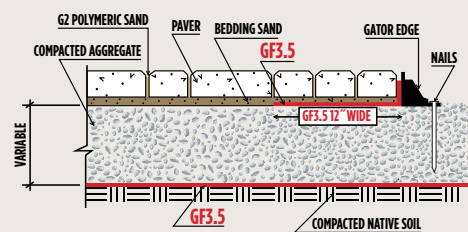


Features

- Hydrophilic, allows high-water flow (135 gallons per minute per foot)
- Drainage and filtration
- Soil separation
- Erosion control

Applications

- Staircases
- Patios, walkways and driveways
- Retaining wall
- Gator Base applications
- Garden and landscape covering

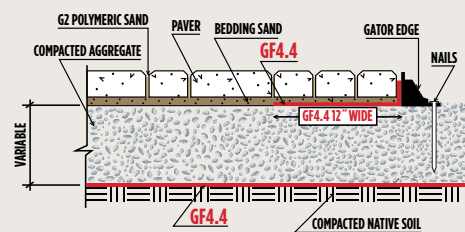


Features

- Reinforcement
- Soil separation
- High tensile strength
- High load capacity
- Extra resistant to punctures and tears

Applications

- Driveways and parking lots
- Poor soil foundation reinforcement (clay soils)
- Leveling pad retaining wall foundation
- Permeable foundation applications of driveways, parking spaces and more

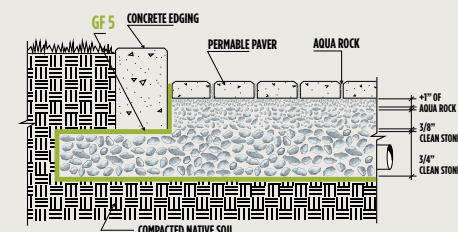

For more product details consult TDS on AllianceGator.com



SELECT THE RIGHT GATOR FABRIC FOR YOUR HARDSCAPE PROJECT



GF20 POLYSPUN FLOWER BEDS




Features

- Specially treated to be hydrophilic
- Soil separation
- Reduces weed growth
- Allows water, fertilizer and air to pass through

Applications

- Garden
- Flower beds
- Landscape covering

20
years



GF2 SPUNBOND GARDEN AND LANDSCAPE COVERINGS



Features

- Easy to cut
- Tear-resistant
- Inert to biological degradation
- Inert to soil chemicals (Alkalies, Acids)
- Creates a barrier that reduces weed growth
- Allows water, fertilizer and air to pass through

10
years

Applications

- Weed control and soil separation
- Flower beds and mulched area
- Garden landscape covering



GF3 SPUNBOND GARDEN AND LANDSCAPE COVERINGS



Features

- Easy to cut
- Tear-resistant
- Inert to biological degradation
- Inert to soil chemicals (Alkalies, Acids)
- Creates a barrier that reduces weed growth
- Allows water, fertilizer and air to pass through

20
years

Applications

- Weed control and soil separation
- Flower beds and mulched area
- Garden landscape covering



CROSS-REFERENCE CHART FOR GATOR FABRICS AND GATOR GRIDS

| Alliance Gator | | | Comparative Products | | | | | | | | |
|----------------|--------------------------------|---|----------------------|------------------------|---------------------------|--------------------------|--------------------|-------------------------|---------------------------|------------------|------------------|
| Category | Product | Application | SRW | Tencate | Hanes | Strata | Texel (Lydall) | Synteen | Tensar | Carthage Mills | Geostar |
| Gator Fabric | GF 3.5 (80 Lbf) Non-Woven | Drainage and Filtration | LS3 | Mirafi 135 N | Terratex no. 3 | StrataTex ST-131 | TEX-500 | N/A | N/A | FX-30HS | Geostar GN 31 |
| | GF 4.4 (100 Lbf) Non-Woven | Drainage and Filtration | NW4 | Mirafi 140 NC | Terratex SD/4.5 | StrataTex ST-140 | TEX-700N | N/A | N/A | FX-40HS | Geostar GN 40 |
| | GF 5 (200lbf) Woven | Stability and separation of subgrade in paver or wall foundations | SS5 | Mirafi 500 X | Terratex GS | StrataTex SW-200 | SX-90T | N/A | N/A | Slit Film FX-55 | GeoWeave 40 |
| | GF 2 (10 years) Spunbond | Separation and Weed Control | SB2 | N/A | ProSteel/ProSilver | N/A | N/A | N/A | N/A | LX-SB20 | N/A |
| | GF 3 (20 years) Spunbond | Separation and Weed Control | SB3 | N/A | ProSteel+/ProSilver+ | N/A | N/A | N/A | N/A | LX-SB30 | N/A |
| | GF 20 (20 years) Polyspun | Separation and Weed Control | Polyspun 15 years | N/A | Pro Ion 20 years | N/A | N/A | N/A | N/A | N/A | N/A |
| Gator Grid | GG 20-20 (1368 lbf/ft) Biaxial | Staircase, landing area low retaining wall | Universal Biaxial | Miragrid XL Biaxial | Terragrid SX-2020 Biaxial | N/A | BX-1100 T1 Biaxial | Synteen SF 10 Biaxial | BX-1100 Biaxial | GBX-2020 Biaxial | N/A |
| | GG 30-30 (2052 lbf/ft) Biaxial | Segmental retaining wall, erosion control | 3 series Biaxial | Miragrid 2XT Biaxial | Terragrid SX-3030 Biaxial | Microgrid/SG-150 Biaxial | BX-1200 T2 Biaxial | Synteen SF 11 Biaxial | BX-1500 Biaxial | GBX-3030 Biaxial | MG-100 Biaxial |
| | GG 50-50 (3420 lbf/ft) Biaxial | Segmental retaining wall, erosion control and more | 5 series Uni-Axial | Miragrid 3XT Uni-Axial | N/A | Stratagrid 200 Uni-Axial | BX-1500 T3 Biaxial | Synteen SF 35 Uni-Axial | UX-1100/UX-1400 Uni-Axial | GX-300 Uni-Axial | HP-200 Uni-Axial |

For more product details consult TDS on AllianceGator.com



Gator Stone Bond and Gator Stone Bond XP



Gator Stone Bond Liquid Stone Stabilizer and Gator Stone Bond XP are a unique blend of acrylic polymers designed to bind together a wide variety of small aggregates commonly referred to as DG (decomposed granite): pathway mixes, crusher runs, concrete sand, etc.



Benefits

- Ready to use right out of the container
- Easy-to-apply one-coat application
- For residential and commercial use
- Reduces dust, gravel migration and erosion
- Allows the use of patio/pathway year-round
- No special tools or skills required to build
- Build using local aggregates (stone mixes such as 3/8 minus, 1/4 minus or 3/16 minus)
- Will not harm plants or aquatic life
- EPA-compliant
- **Gator Stone Bond XP is available in Canada and USA. Gator Stone Bond is available in the states of California, Nevada, Texas and Arizona**



Gator Rock Bond



Gator Rock Bond is a single-component binder that creates a durable, permeable, and decorative surface when mixed with riverstone. Great for garden pathways where erosion and drainage are a concern.

Features

- Porous and permeable
- Keeps stones in place
- Reduces maintenance and clean-up
- Durable in extreme conditions

Rock and Binder Kit

Includes one component liquid binding agent (1/2 quart/473 ml) and 3/8" riverstone (40 lb/18.2 kg).

Liquid Binding Agent

One component liquid binding agent (1 gallon/3.78 liters).

Types of rocks that can be used with Gator Rock Bond: Granite • Limestone • Marble (1/8" to 3/8"). These rocks have to be clean and strong (not brittle), free of dust and 100% dry.



CLEANING PRODUCTS



Efflorescence

**STRONGER
CLEANING
FORMULA
BUT GENTLE
TO THE PAVERS**

Features

- Removes efflorescence from the surface of concrete pavers and natural stones
- Cleans pavers prior to sealing
- Removes penetrated dirt
- Restores pavers to their natural color
- No hydrochloric acid in product



Shampoo

Features

- Removes penetrated dirt
- Restores pavers to their natural color
- No hydrochloric acid in product



Sprayer

Features

- Easy to use, provides an accurate water-to-cleaner mix
- Connects directly to your garden hose
- Use with Gator Shampoo or Gator Efflorescence Cleaner



XP Oil & Grease Remover

Features

- No scrubbing, no rinsing, no mess
- Just shake it, spread it on the stain, let it dry and sweep it off
- Easily lifts and absorbs embedded oil stains as it dries from liquid to powder



Rust Remover

Features

- Removes the spots caused by steel, water build-up, fertilizer, etc
- Contains no muriatic acid
- Easy to use



Rubber, Paint & Tar Remover

Features

- Washes off with water
- Easy to use
- Emulsifies some sealers
- Remover and cleaner for bonding agent
- Cleans sealing tools such as sprayer



Gatorene

Features

- Degreases and cleans tools
- Thins specialty coatings
- Flushes metal sprayers





WATER BASED SEALERS

FOR DRY CAST CONCRETE PAVERS

Hybrid High Gloss +COLOR ENHANCER

Gator Hybrid Sealers + Color Enhancer

Gator Hybrid Sealers + Color Enhancer are 100% pure high-grade acrylic used to seal concrete pavers. It penetrates deep into the concrete paver pores, reducing the oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt.



Features

- High gloss finish
- Vibrant color enhancement

Hybrid Low Gloss +COLOR ENHANCER



Features

- Low gloss finish
- Vibrant color enhancement



Hybrid High Gloss

Features

- High gloss
- No color enhancement

Gator Hybrid Sealers

Gator Hybrid Sealers are 100% pure high-grade acrylic used to seal concrete pavers. It penetrates deep into the concrete paver pores, reducing the oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt.



Hybrid Low Gloss

Features

- Low gloss
- No color enhancement



Hybrid Zero Gloss

Features

- Zero gloss
- No color enhancement

Common Features for All Hybrid Sealers

- Helps resist corrosion from de-icing salt, effects from UV rays, motor oil and grease stains
- Works above 40°F (4°C)
- Film former
- Joint stabilizer
- Will not discolor
- Rapid Installation
- Low VOC
- Rain-safe after 24 hours



SOLVENT BASED SEALERS

FOR DRY CAST CONCRETE PAVERS

Gator Sealers are made from acrylic-based polymers. Gator Sealers penetrates deep into the concrete pavers, thus reducing the oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt. Gator Seal Wet Look and Satin Look are specifically formulated to be used on unsealed surfaces only. Gator Seal Resealer will penetrate the formula of the existing solvent based sealer and reactivate the molecules to create a rejuvenated seal and protect the surfaces.

Features

- Easier to clean and maintain
- Solvent-based
- Rain-safe after 90 minutes
- Works between 60°F (16°C) and 85°F (29°C)

Helps resist

- Corrosion from de-icing salt
- Effects from UV rays
- Motor oil and grease stains



Wet Look

- High Gloss
- Vibrant Color Enhancer
- Joint stabilizer
- Film Former




Satin Look

- Low Gloss
- Subtle Color Enhancer
- Joint stabilizer
- Film Former



Resealer

- Revives Look

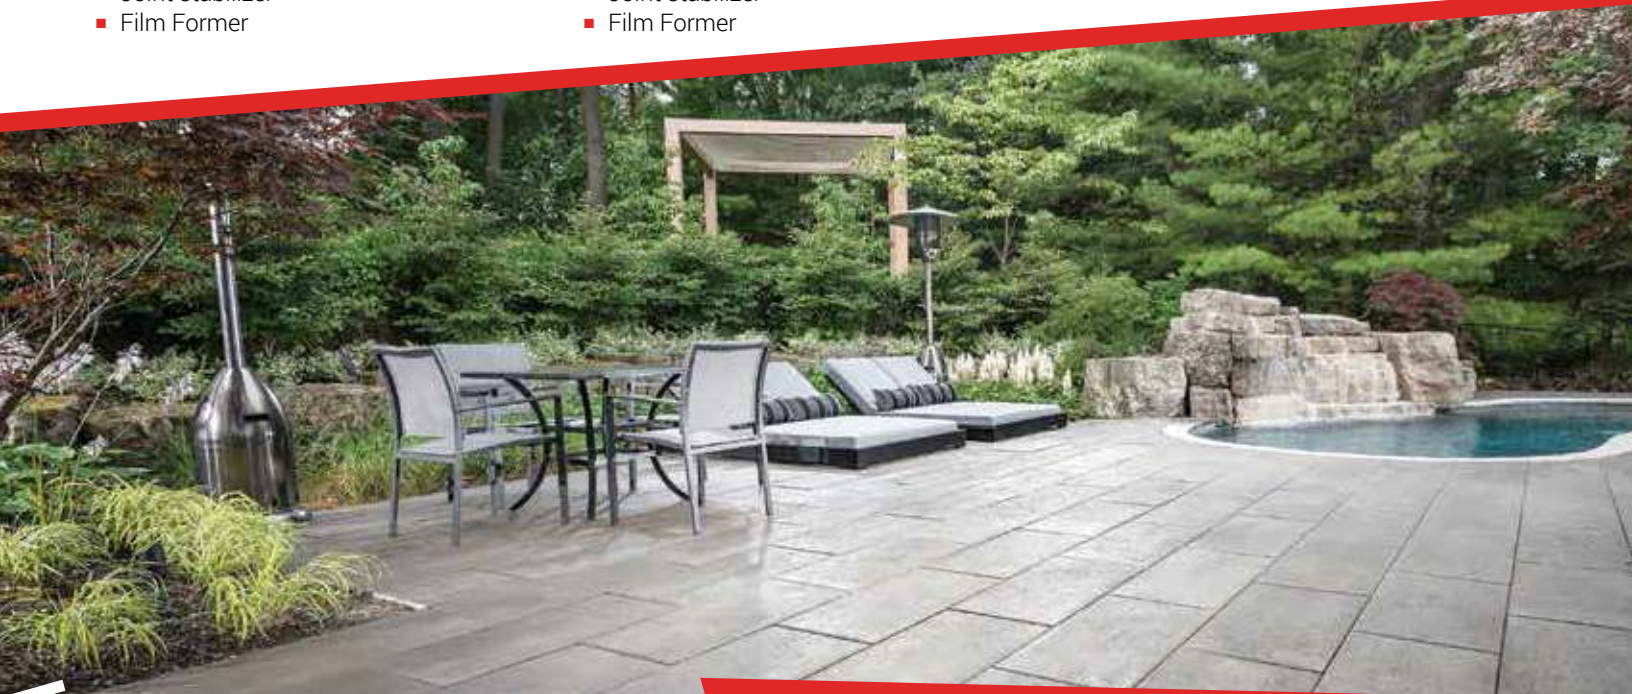



Signature

SERIES

Natural Stone Zero Gloss

**+COLOR
ENHANCER**



Gator Seal Signature Series for Natural Stone is a color enhancer and is made of silicone-based polymers. This sealer penetrates deep into the natural stone, reducing the oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt.

Features

- Non film-former
- Vibrant color enhancer
- Apply on dry surface only
- Works at above 40°F (4°C)
- Rain-safe after 24 hours
- Easier to clean and maintain
- For use on salt-water pool patio areas
- Water-based, Zero Gloss
- Darkens the color (wet look)
- UV-resistant
- Stain protection

Natural Look Natural Look Finish Zero Gloss

**MULTI-
PURPOSE**



Gator Seal Signature Series Natural Look is made from fluorochemical polymers. This sealer penetrates deep into the concrete pavers, walls, masonry and natural stones, reducing the oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt.

Features

- Non film-former
- Applicable on damp surfaces
- Works above 32°F (0°C)
- Rain-safe after 24 hours
- Zero VOC
- Water based sealer
- Helps resist stains up to 10 years

Wet Cast Low Gloss

**+COLOR
ENHANCER**



Gator Seal Signature Series for Wet Cast products with color enhancer is made from acrylic-based polymers. It penetrates deep into the Wet Cast products, reducing the oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt. Specifically formulated to be used on unsealed surfaces only.

Features

- Film former
- Subtle color enhancer
- Joint stabilizer
- Works between 60°F (16°C) and 85°F (29°C)
- Rain-safe after 90 minutes
- Easier to clean and maintain
- Solvent based
- Low gloss

Wet Cast Natural Look Finish Zero Gloss



Gator Seal Signature Series for Wet Cast products is made from fluorochemical polymers. This sealer penetrates deep into the Wet Cast products, reducing the oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt.

Features

- Non film-former
- Can be applied to damp surfaces
- Works at above 32°F (0°C)
- Rain-safe after 24 hours
- Easier to clean and maintain
- Water based, zero gloss
- Natural look



**HYBRID
HIGH GLOSS**
+COLOR ENHANCER

**HYBRID
LOW GLOSS**
+COLOR ENHANCER

**HYBRID
HIGH GLOSS**

**HYBRID
LOW GLOSS**

**HYBRID
ZERO GLOSS**

| | | | | | |
|--------------------------------|-------------|-------------|-------------|-------------|-------------|
| Formulation | Water-Based | Water-Based | Water-Based | Water-Based | Water-Based |
| Finish | High Gloss | Low Gloss | High Gloss | Low Gloss | Zero Gloss |
| Color Enhancer | Vibrant | Vibrant | None | None | None |
| Joint Stabilizer | ✓ | ✓ | ✓ | ✓ | ✓ |
| Film-Former | ✓ | ✓ | ✓ | ✓ | ✓ |
| Can be applied on damp surface | ✓ | ✓ | ✓ | ✓ | ✓ |
| Rain-Safe After | 24 hours | 24 hours | 24 hours | 24 hours | 24 hours |
| Dry Cast Concrete Paver | ✓ | ✓ | ✓ | ✓ | ✓ |
| Wet Cast | | | | | |
| Natural Stone | | | | | |
| Masonry | | | | | |

Before



After



Before

After

Protect and enhance your hardscape project with one of the many sealer products offered by Alliance. To learn more, visit AllianceGator.com



Signature SERIES



| | | | | | |
|---|---|---|---|---|--|
| WET LOOK HIGH GLOSS Vibrant Color Enhancer | SATIN LOOK LOW GLOSS Subtle Color Enhancer | NATURAL STONE ZERO GLOSS +COLOR ENHANCER | NATURAL LOOK NATURAL LOOK FINISH ZERO GLOSS MULTI-PURPOSE | WET CAST LOW GLOSS +COLOR ENHANCER | WET CAST NATURAL LOOK FINISH ZERO GLOSS |
|---|---|---|---|---|--|

| | | | | | |
|---------------|---------------|-------------|-------------|---------------|-------------|
| Solvent-Based | Solvent-Based | Water-Based | Water-Based | Solvent-Based | Water-Based |
| High Gloss | Low Gloss | Zero Gloss | Zero Gloss | Low Gloss | Zero Gloss |
| Vibrant | Subtle | Vibrant | None | Subtle | None |
| ✓ | ✓ | | | ✓ | |
| ✓ | ✓ | | | ✓ | |
| | | | ✓ | | ✓ |
| 90 minutes | 90 minutes | 24 hours | 24 hours | 90 minutes | 24 hours |
| ✓ | ✓ | | ✓ | | |
| | | | | ✓ | ✓ |
| | | ✓ | ✓ | | |
| | | | ✓ | | |



All products are SCAQMD-compliant. First test the product on a small, less-observed area of approximately 4 sq. ft. (0.4 sq. m.) to ensure results meet your expectations. Expect final color, variation and shade (lightness-darkness) to vary in most instances. All concrete or natural stone exhibit variations, therefore the sample charts should be used as a general guideline only when selecting sealer type. Color matches cannot be guaranteed.



AllianceGator.com

Gator Polymeric Sands • Gator Dust • Gator Aqua Rock
 Gator Tile Systems • Gator Fabric • Gator Grid
 Gator Base • Gator Base Screws • Gator Spacer
 Gator Block Bond • Gator Clean • Gator Seal
 Gator Hybrid Seal • Gator Edge • Gator
 Gator Rock Bond
 r Polymeric

